


## CP2415-RGB

Small-screen auditoriums | Boutique cinema | Post production | Screening rooms

**Advanced, yet affordable, DCI compliant cinema projection featuring Christie RealLaser™ technology for screens up to 52 feet wide**



### Key features:

- › **Electronic color convergence** - Provides perfect alignment throughout the entire image
- › **Enhanced Wavelength Diversity (EWD)** - Uses multi-wavelength primary color lasers to improve image performance on high-gain screens
- › **Long-lasting light source** - over 50,000 hours of optimal performance
- › **Low maintenance** - sealed optics for protection against dust ingress
- › **Backwards compatibility** - works with existing Christie accessories and lenses
- › **Best-in-class operational efficiency** - 12.7 lumens per watt

**CHRISTIE**  
RealLaser™ 

Advanced laser light source for accurate reproduction of DCI content

**CineLife+**™ 

Brilliant electronics that help maintain day-one performance

**CINEMASTER CALCULATOR** 

Find the right projector and lens for your screen



## Specifications Christie CP2415-RGB

<b>Brightness</b>	nominal	• Up to 15,000 lumens
	lifetime	• >50,000 hours <sup>1</sup>
<b>Contrast ratio</b>		• Up to 6000:1 (UHC lens required) <sup>2</sup>
<b>Digital micromirror device</b>		• 0.98" mDC2K 3-chip DMD DLP Cinema® • 2048x1080 (2K)
<b>Color gamut</b>	native gamut	• >95% of Rec 2020 coverage
<b>Processing electronics</b>		• Christie (R) CineLife+™ Series (Series-2 IMB compatible) <sup>3</sup> • HDMI 2.0 x 2 • 1G Ethernet x1 • 12G SDI x 4 • DisplayPort 1.2 x 2 • Remote UI • Electronic Color Convergence (ECC)
<b>Lens mount configuration</b>		• Fully motorized Intelligent Lens System (ILS™)
<b>Lenses</b>		• 1.05:1 / 1.20-1.75:1 / 1.39-1.9:1 / 1.5-2.2:1 / 1.75-2.4:1 / 1.9-3.0:1 / 2.4-3.9:1 / 3.9-6.52
<b>Power input requirements</b>		• Input A: 200-240 VAC @ 50-60Hz, 10A max • Input B (UPS input): 100-240VAC @ 50-60Hz, 10A (8A typical @ 120V)
<b>Cooling</b>		• Liquid pressurized/TEC, self-contained • Heat extraction optional
<b>Power consumption</b>		• 1177W <sup>4</sup> , max DCI brightness, @25°C 4030 BTU/hr
<b>Laser class</b>		• Class 1 – Risk Group 3
<b>Weight</b>		• As installed: 174lbs max (79kg)
<b>Dimensions (w/o lens)</b>	size (LxWxH)	• 42.6 x 25.0 x 13.3" (1083 x 635 x 337mm)
<b>Accessories</b>		• Touch panel controller (optional) • Rack mount pedestal • Rack mount pedestal adaptor • Extraction duct adaptor


<sup>1</sup> Subject to variables specific to each installation. Please see Christie's laser best practices guide for more information.

<sup>2</sup> Supports legacy Series 2 IMBs. A list of supported versions is available upon request.


<sup>3</sup> Available in HB and UHC lens versions.

<sup>4</sup> Typical power consumption. May be impacted by environmental conditions.


## Front view




## Side view

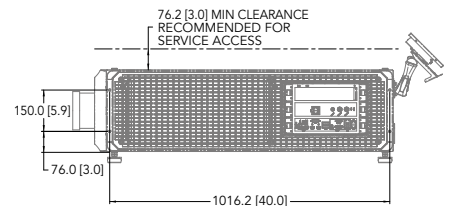

## Top view

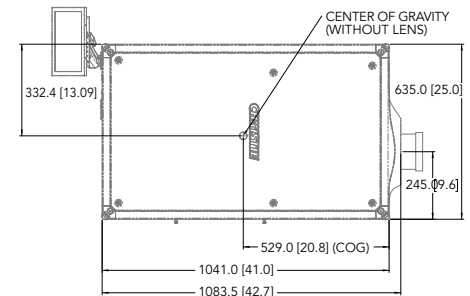

## Back view



### Corporate offices

Christie Digital Systems USA, Inc.  
Cypress  
PH: +1 714-236-8610  
Christie Digital Systems Canada Inc.  
Kitchener  
PH: +1 519-744-8005

### Worldwide offices

Australia  
PH: +61 (0) 7 3624 4888  
Brazil  
PH: +55 11 3181-2952  
China (Beijing)  
PH: +86 10 6561 0240  
China (Shanghai)  
PH: +86 21 6030 0500

China (Shenzhen)  
PH: + 86 755 3680 7000  
Colombia  
PH: +57 (315) 652-9620  
Germany  
PH: +49 221 99 512-0  
India  
PH: +91 (080) 6708 9999

Mexico  
PH: +52 (55) 4744-1791  
Singapore  
PH: +65 6877 8737  
South Korea  
PH: +82 2 702 1601  
Spain  
PH: +34 (0) 91 633 99 50

United Arab Emirates  
PH: +971 (0) 4 503 6800  
United Kingdom  
PH: +44 (0) 118 977 8000  
United States (Arizona)  
PH: +1 602-943-5700  
United States (Texas)  
PH: +1 469-757-4420

For the most current specification information, please visit [christiedigital.com](http://christiedigital.com)

Copyright 2023 Christie Digital Systems USA, Inc. All rights reserved. Our centers of excellence for manufacturing in Kitchener, Ontario, Canada and in Shenzhen, China are ISO 9001:2015 Quality Management System-certified. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. "Christie" is a trademark of Christie Digital Systems USA, Inc., registered in the United States of America and certain other countries. DLP® and the DLP logo are registered trademarks of Texas Instruments. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.  
CD4795-Christie-CP2415-RGB-Datasheet-Jul-24-EN

