




1.58-2.53
mm

Indoor LED FE Series

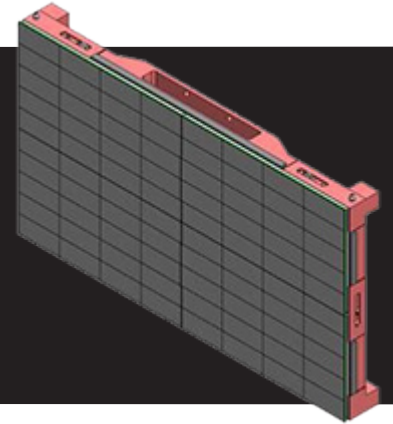

- Each tile is exactly a 16:9 aspect ratio for use of standard content
- Front access for installation and service
- Magnetic LED module attachments allow quick installations and maintenance
- High refresh rate for a flicker-free performance
- Precision die-case aluminum frame provides an easier installation and exact panel alignment




FE SERIES SPECIFICATIONS

Model		FE-15	FE-19	FE-25
Pixel Pitch	mm	1.58mm	1.9mm	2.53mm
Pixel Configuration		3-in-1 SMD		
Resolution	w x h	384 x 216 pixels	320 x 180 pixels	240 x 136 pixels
Pixel Density	pixels / ft ²	37,058 pixels/ft ²	25,753 pixels/ft ²	14,583 pixels/ft ²
	pixels / m ²	398,892 pixels/m ²	277,008 pixels/m ²	156,971 pixels/m ²
Brightness Nits (cd/m ²)	native (max)	1,200 nits (cd/m ²)		
	calibrated	800~1000 nits (cd/m ²)		
Dimming Capability		0-255 levels		
Contrast Ratio		≥3,000:1		
Refresh Rate		2880 Hz		
Color Processing		12-Bit		
Colors		68 Billion		
Power Consumption (Per Cabinet)	max	244	222	215
	average	81	74	72
Cabinet Size W x H x D	in	23.9 x 13.5 x 2.6 in		
	mm	608 x 342 x 65 mm		
Weight	lbs (Kg)	19.8 lbs (9 kg)		
Viewing Angle	horizontal	140°		
	vertical	140°		
Lifetime*	hours	100,000 hours		
Service Access		Front		
Ruggedness		Front: IP40; Rear: IP20		
Certification		FCC, UL		
Relative Humidity	operational	10-90%		
	storage	10-90%		
Temperature	operational	14-104° F		
		-10-40° C		
	storage	-4-140° F		
		-20-60° C		
Power Input		100~240 VAC, 47~63 Hz		

*Lifetime is to half brightnes with typical use.

FE SERIES DIMENSIONS

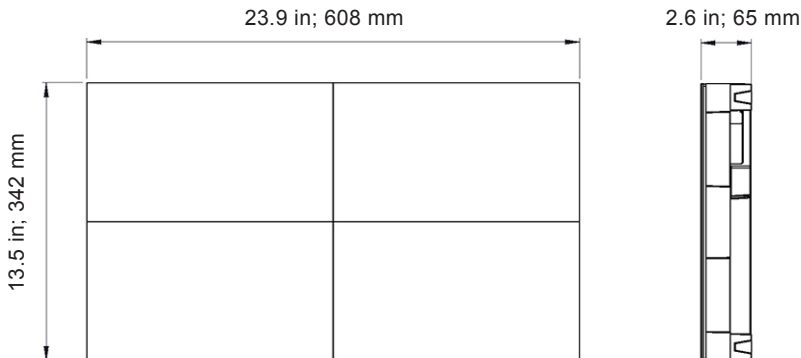

A: 1600 NW Compton Drive, Suite 100, Hillsboro, OR 97006

W: www.deltadisplaysusa.com

P: 888-937-2743

E: DisplaySupport.US@deltaww.com; DisplaySales.US@deltaww.com

Note: Delta reserves the right to alter specs at any time without notice.
Please consult a Delta Displays representative to confirm specifications.

