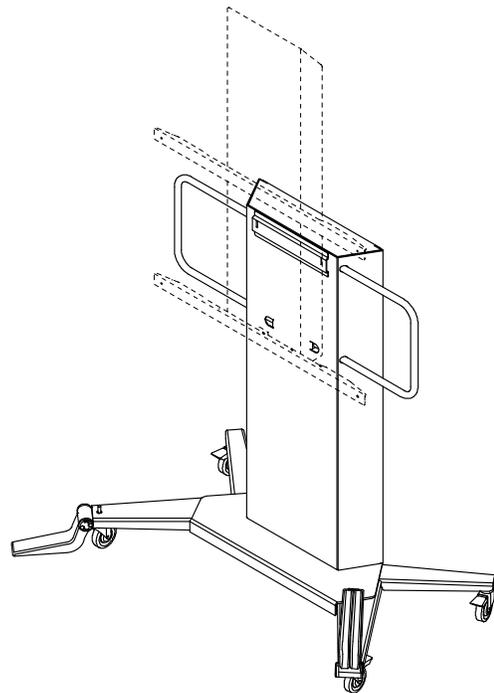Specifications

SMART Mobile Height-Adjustable Floor Stand

Model FS-UX

Physical specifications

Size

Wall mount
43 1/2" W × 58" H × 7" D
(110 cm × 147 cm × 17.7 cm)

Floor stand
69 1/2" W × 61 3/4" H × 39 1/2" D
(176.7 cm × 157 cm × 100.3 cm)

Weight

Wall mount
98 lb. (44.4 kg)

Floor stand
176 lb. 8 oz. (80.1 kg)

Shipping size

Wall mount
21 3/4" W × 61 3/4" H × 7 1/4" D
(55.2 cm × 157 cm × 18.4 cm)

Floor stand
38" W × 59" H × 9" D
(96.5 cm × 149.9 cm × 22.9 cm)

Shipping weight

Wall mount
110 lb. (49.9 kg)

Floor stand
207 lb. (94 kg)

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

NOTE

For a list of supported interactive projector systems, as well as their shipping sizes, weights and order numbers, see smarttech.com/supportedsystems.

Extraordinary made simple® | SMART

Standard features

Adjustable height

25" (63 cm) of vertical travel enables you to raise or lower the interactive whiteboard to a convenient height.

With SMART Board® 660 interactive whiteboard

Reach points for this interactive whiteboard on the floor stand

Interactive whiteboard position	Lowest reach point	Highest reach point
Lowest position	19" (48 cm)	57 1/2" (146 cm)
Highest position	44" (112 cm)	82 1/2" (210 cm)

With SMART Board 680, M680, 685, M685, 880 or 885 interactive whiteboard

Reach points for these interactive whiteboards on the floor stand

Interactive whiteboard position	Lowest reach point	Highest reach point
Lowest position	11 1/4" (28 cm)	57 1/2" (146 cm)
Highest position	36 1/4" (92 cm)	82 3/8" (209 cm)

> **ℹ NOTES**
> - Reach point refers to the height of the SMART Board interactive whiteboard's touchable screen (see *Mobility and display dimensions* on page 4 for more information).
> - See smarttech.com/support for your interactive whiteboard's specifications.

Power source

The wall mount's lifting mechanism operates from 115V to 230V sources.

The wall mount uses 100 W while raising or lowering your interactive whiteboard and uses 3 W at 120 VAC to 8W at 240 VAC in Standby mode.

Security

Height-adjustable mount automatically locks in position

Mobility

The floor stand features two vertical grab bars which enable you to easily move the unit. The self-contained system rolls on 4" (10 cm) heavy-duty, non-marking, locking casters.

System stability

The floor stand is equipped with locking anti-tip feet compliant with CSA/CE safety requirements. Its wide footprint and reinforced steel frame provide excellent stability for writing on or touching your interactive product.

Room-to-room mobility (SMART UX60 projector systems only)

Pivots through a 30" (76 cm) doorway

> **☞ IMPORTANT**
> When used with a SMART UF55, UF65, UF70 or UF75 projector, the floor stand is intended for in-room mobility only. The length of the boom on these projectors prevent them from passing through standard doorways.
>
> When used with a SMART UX80 projector, the floor stand fits through a 32" (81 cm) opening if you adjust the projector boom.

Environmental compliance	China EIP, EU REACH, EU RoHS, EU WEEE, US Packaging, US Conflict Minerals
Regulatory certification	CSA, CE, WEEE
Warranty	Two-year limited equipment warranty

Integration features

SMART Products Your SMART Mobile Height-Adjustable Floor Stand integrates with many SMART Board projector systems.

For a list of supported products, see smarttech.com/suportedsystems.

👉 **IMPORTANT**

The floor stand is not compatible with SMART Board 685 interactive whiteboards with serial numbers lower than SB685-R2-670000 or serial numbers lower than SD685-R2-002000 that were distributed in Europe and North, Central, and South America.
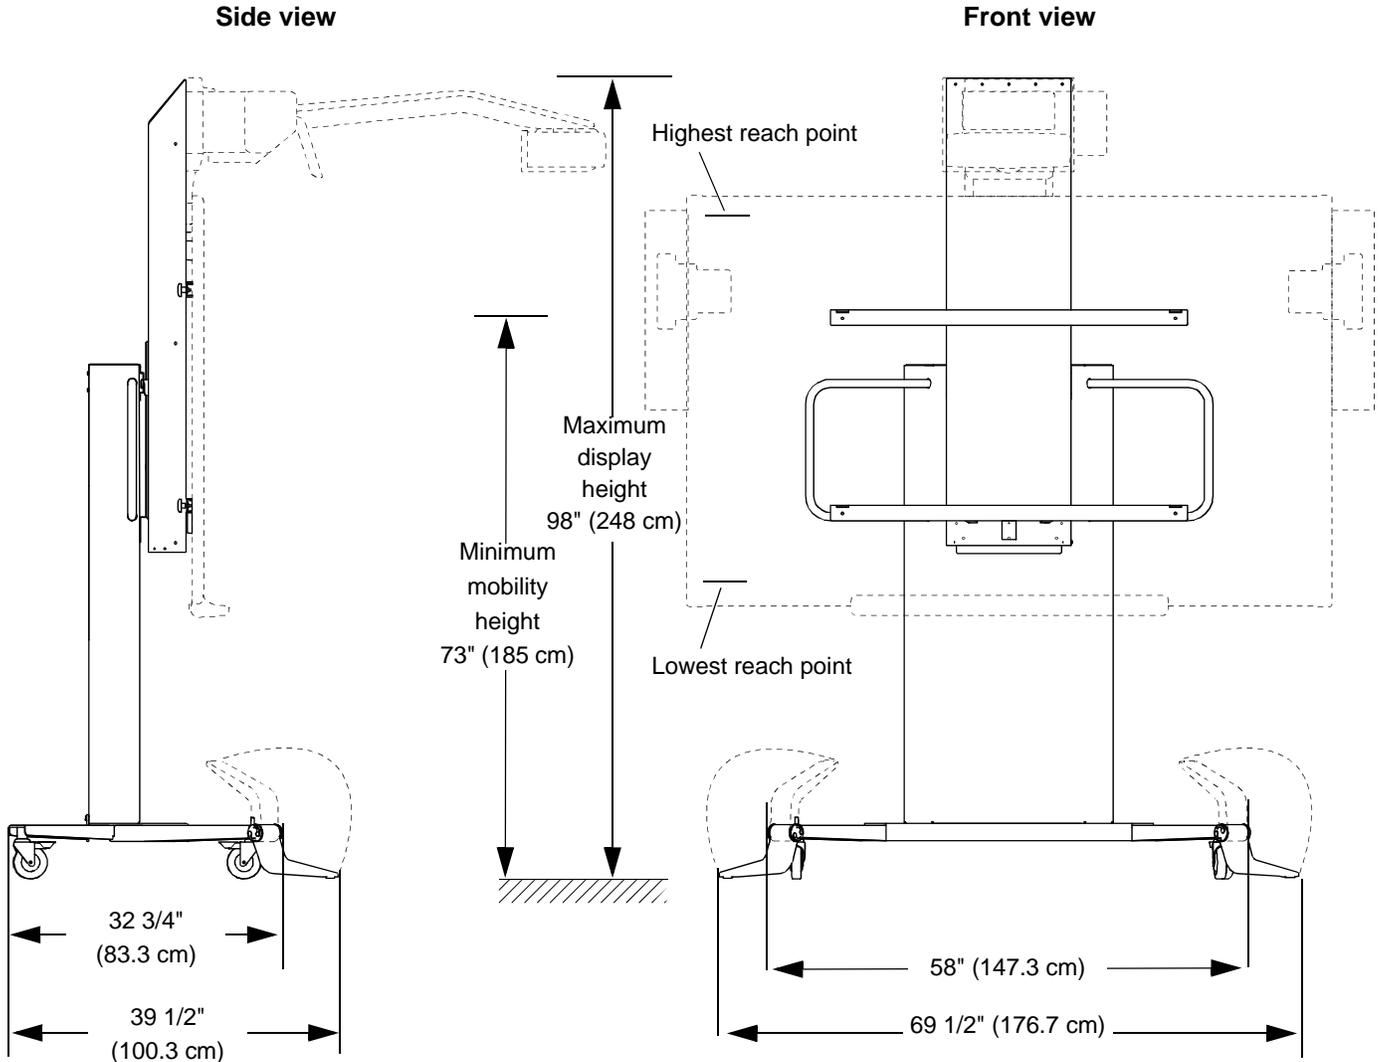
Storage and operating specifications

Operating temperature Operating temperature range depends on your projector and interactive whiteboard. See your product documentation for more information.

Storage temperature -40ºF to 140ºF (-40ºC to 60ºC)

Humidity 95ºF (35ºC) with up to 85% relative humidity, non-condensing

SMART order numbers

FS-UX Mobile Height-Adjustable Floor Stand for SMART Board interactive whiteboards. This product includes both a height-adjustable wall mount and a floor stand.

FS-UX-LTS Laptop shelf for the SMART FS-UX Mobile Height-Adjustable Floor Stand

Mobility and display dimensions

Side view

Front view

Highest reach point

Maximum display height 98" (248 cm)

Minimum mobility height 73" (185 cm)

Lowest reach point

32 3/4" (83.3 cm)

39 1/2" (100.3 cm)

58" (147.3 cm)

69 1/2" (176.7 cm)

Back view (bottom cavity)

Cavity width
18.5" (47 cm)

Cavity height
23" (58 cm)

Cavity depth
6" (15 cm)

SMART.